

DDS238-4(D1401)

single phase din rail type energy meter

The meter is designed to measure single phase two wire AC active energy like residential, utility and industrial application. It is a long life meter with the advantage of high stability, high over load capability, low power loss and small volume.



D1401-1



D1401-2


Basic Function

- Mechanical step register 5+1 or LCD display 6+1
- Bi-directional total active energy measurement, reverse active energy measure in the total active energy
- For LCD display type meter, Energy data can store in memory chip more than 15 years after power off
- Pulse LED indicates working of meter, Passive pulse output with optical coupling isolation
- 35mm din rail installation

Technical Data

Rate voltage	110V,120V,220V,230,240V (0.8~1.2Un)		
Rate Current / Frequency	5(60)A , 10(100)A / 50Hz or 60Hz ± 10%		
Connection mode	Direct type	Accuracy class	1% or 0.5%
Power consumption	<1W/10VA	Start current	0.004lb
AC voltage withstand	4000V/25mA for 60s	Over current withstand	30Imax for 0.01s
IP grade	IP20	Executive standard	IEC62053-21 DIN 43880
Work temperature	-25 °C ~70 °C	Pulse output	Passive pulse, 80 ± 5 ms

Wire connection

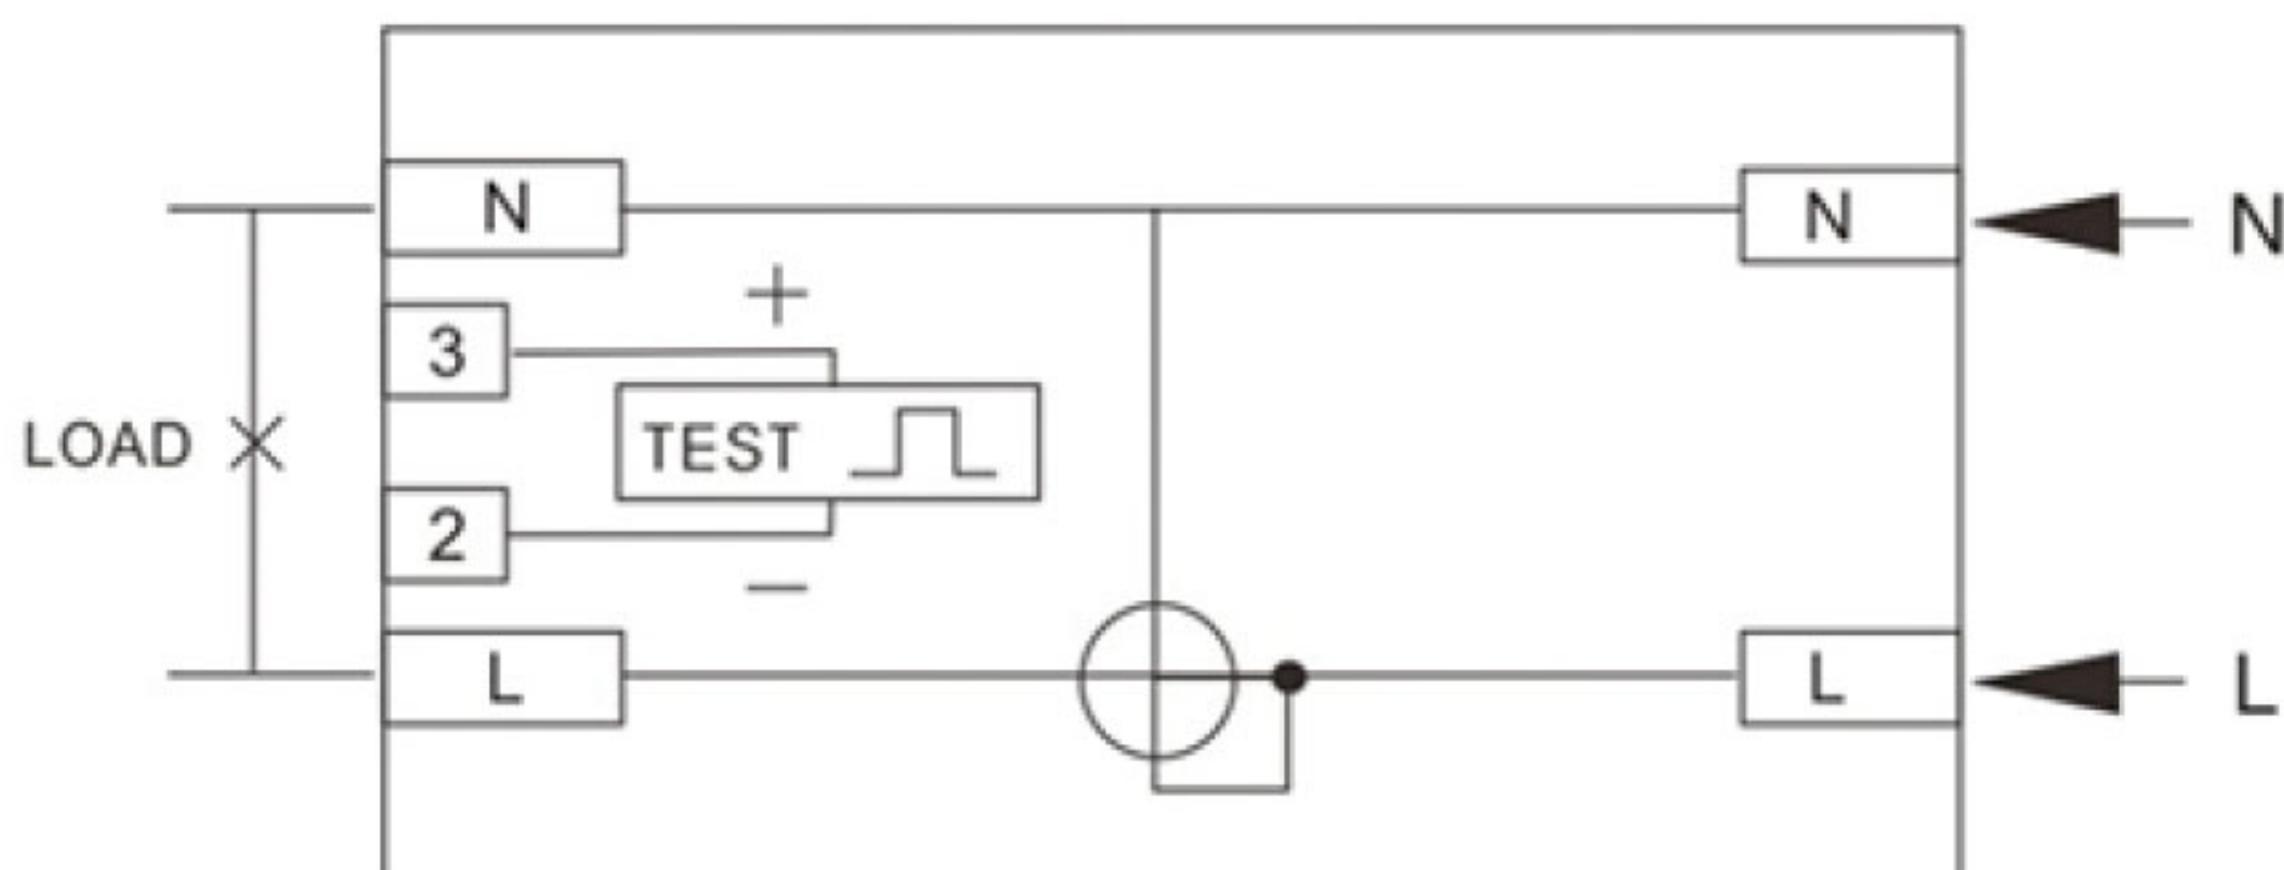

Outline dimension

