DTS238-7-R(D3702)

three phase din rail type energy meter









D3702-4

D3702-1 D3702-2 D3702-3

The meter is used in three phase four wire power grid. The meter is designed to measure AC active energy. All of its functions comply with the relative technical requirement for class 1 three phase watt hour meter in IEC62053-21. It is a long life meter with the advantage of high stability, high over load capability, low power loss and small volume.

Basic Function

- Mechanical step register or LCD display
- Bi-directional total active energy measurement, reverse active energy measure in the total active energy
- Pulse LED indicates working of meter, Pulse output with optical coupling isolation
- Loss phase LED indication
- For LCD display type meter, Energy data can store in memory chip more than 15 years after power off
- 35mm din rail installation, bottom type wire connection

Technical Data


Rate voltage AC	3x120/208V, 3x220/380V, 3x230/400V, 3x240/415V
Working voltage range	0.8~1.2Un
Rate Current	5A/CT, 1.5(6)A, 5(60)A, 10(100)A, or other as required
Frequency	50Hz or 60Hz
Connection mode	CT type or Direct type
Display	mechanical step register or LCD
Accuracy class	1.0
Power consumption	<2W/10VA
Start current	0.004lb
AC voltage withstand	4000V/25mA for 60 sec
Impulse Voltage	6kV 1.2 μ s waveform
IP grade	IP51
Constant	800~3200 imp/kWh
Pulse output	Passive pulse, pulse width is $80 \pm 5 \text{ms}$
Executive standard	DIN 43880, IEC62053-21, IEC62052-11
Work temperature	-30℃ ~70℃
Outline dimension LXMXH	122x100x65mm(long terminal cover) 122x115x65mm(long terminal cover)



Environment

Operating temperature	-25℃ ~55℃
Storage temperature	-40℃ ~80℃
Reference temperature	23℃ ±2℃
Relative humidity	0 to 95%, non-condensing
Altitude	Up to 2500m
Warm up time	10s
Mechanical Environment	M1
Electromagnetic Environment	E2
Degree of pollution	2

Wire connection

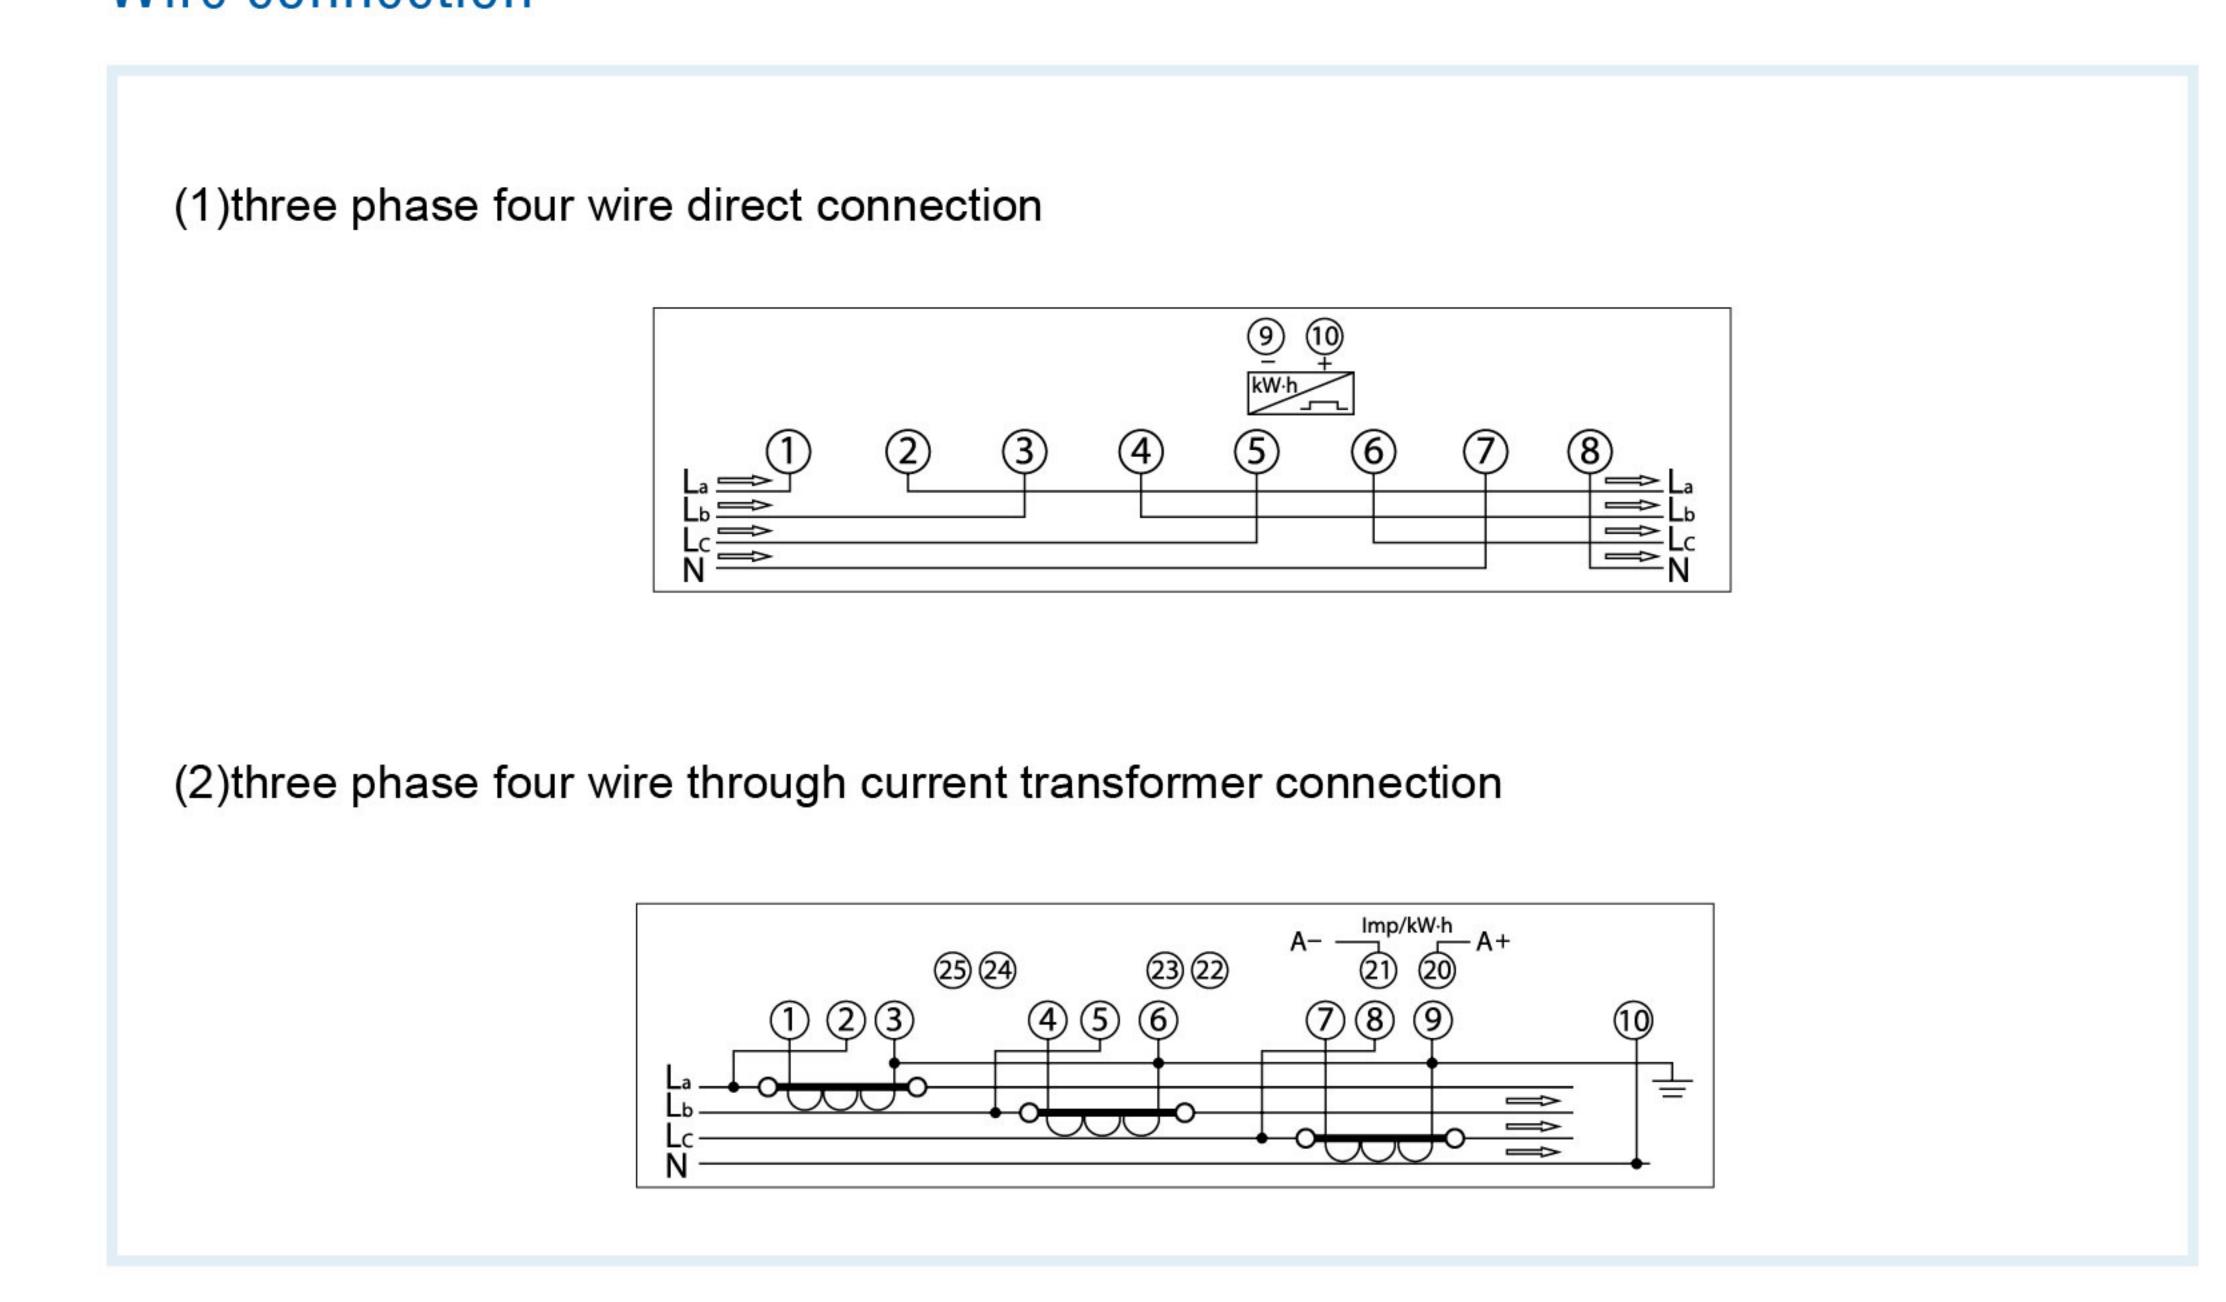

Outline dimension

